




PPK FABRICANDO DE S.A.DE C.V.

NTN 6206LLU deep groove ball bearing

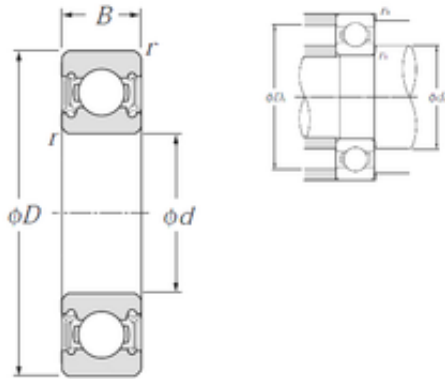

6206LLU Bearing 2D drawings and 3D CAD models

Bearing No. 6206LLU

Size	30x62x16 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	16 mm
d	30 mm
D	62 mm
B	16 mm
C	16 mm
r min.	1 mm
da min.	35 mm
da max	39 mm
Da max.	57 mm
ra max.	1 mm
Weight	0,199 Kg
Basic dynamic load rating (C)	19,5 kN
Basic static load rating (C0)	11,3 kN
Reference speed	7 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.198
EAN	4547359004625
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



PPK FABRICANDO DE S.A.DE C.V.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6206LLU/5C
Weight / LBS	0.438
Outer Race Width	0.63 Inch 16 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter
Bore	1.181 Inch 30 Millimeter
bore diameter:	30 mm
precision rating:	ISO Class 0
outside diameter:	62 mm
finish/coating:	Uncoated
overall width:	16 mm
bearing material:	High Carbon Chrome Steel



PPK FABRICANDO DE S.A.DE C.V.

bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	16 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	16 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	7300 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	7300 RPM
dynamic load capacity:	19500 N
series:	62
static load capacity:	11300 N
manufacturer product page:	Click here